


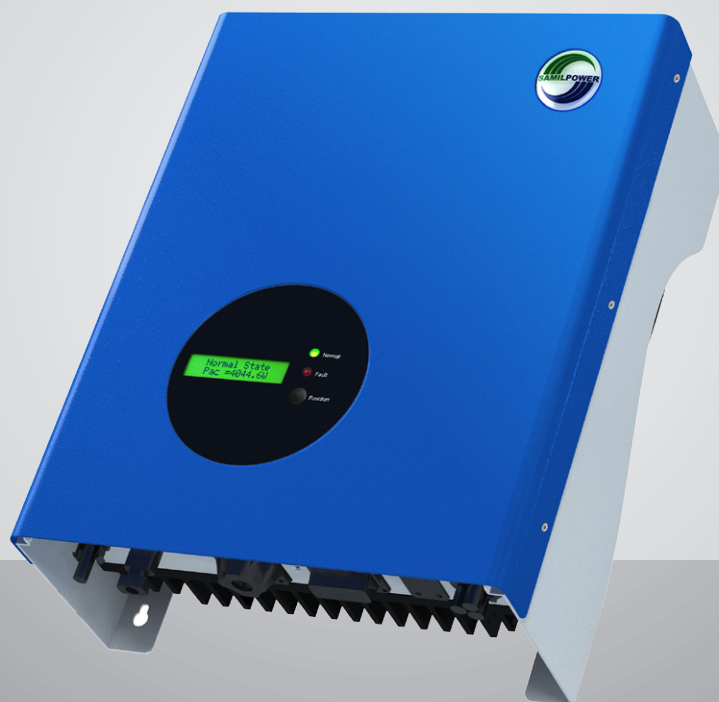

SolarRiver

1100 / 1600 / 2300 / 3000 / 3300 / 4400 / 5200TL

SIMPLE. FLEXIBLE.

- Free site selection due to IP65
- Easy installation and maintenance due to "Plug & Play" connection


OPEN. INTERACTIVE.

- Interface selection – Wi-Fi* and RS485 for more flexible configuration and system monitoring
- Multi-lingual 2-line LCD display

SECURE. EFFICIENT.

- Highest earnings through max. efficiency of 97.6 %
- Free access to the Samil Power monitoring portal
- 5 year standard guarantee

	SolarRiver 1100TL	SolarRiver 1600TL	SolarRiver 2300TL	SolarRiver 3000TL
Input (DC)				
Max. DC power (@cosφ=1)	1100 W	1600 W	2300 W	3000 W
Max. input voltage	550 V			
MPP voltage range / rated input voltage	120 V - 500 V / 380 V	160 V - 500 V / 380 V	200 V - 500 V / 380 V	
Min. input voltage / initial input voltage	100 V / 120 V		100 V / 150 V	
Max. input current input A / input B	8.8 A / -	9.7 A / -	11 A / -	13.5 A / -
Max. input current per string input A / input B	8.8 A / -	9.7 A / -	11 A / -	13.5 A / -
Number of independent MPP inputs / strings per MPP input	1 / 1			
Output (AC)				
Rated power (@ 230 V / 50 Hz)	1000 W	1500 W	2000 W	2600 W
Max. apparent AC power	1000 VA	1500 VA	2200 VA	2800 VA
Nominal AC voltage / range	230 V / 180 V - 270 V			
AC frequency / range	50 Hz, 60 Hz / 44 Hz - 55 Hz, 54 Hz - 65 Hz			
Rated grid voltage / rated grid frequency	230 V / 50 Hz			
Max. output current	5.5 A	8.3 A	11 A	13.8 A
Power factor at rated power	1			
Displacement power factor, adjustable	-			
Feed-in phases / connection phases	1 / 1			
Efficiency				
Max. Efficiency / European weighted efficiency	96.6 % / 95.5 %	96.8 % / 96.0 %	96.8 % / 96.2 %	97 % / 96.3 %
Protective devices				
DC disconnect device / AC disconnect device	- / -			
Ground fault monitoring / grid monitoring	● / ●			
DC reverse polarity protection / AC short-circuit current capability	● / ●			
Galvanic isolation	-			
All-pole-sensitive residual-current monitoring	●			
Protection class (according to IEC 62103) / Overvoltage category (according to IEC 60664-1)	I / II (DC), III (AC)			
General data				
Dimensions (W / H / D)	285 / 385 / 145 mm		332 / 450 / 161 mm	
Weight	15 kg		18 kg	
Operating temperature range	-25 °C ... +60 °C			
Noise emission (typical)	< 28 dB		< 30 dB	
Self-consumption (night)	0 W			
Topology	Transformerless			
Cooling concept	Convection			
Degree of protection (according to IEC 60529)	IP65			
Maximum humidity (non-condensing)	95 %			
Features				
DC connection / AC connection	Multi-Contact MC4, Amphenol MC4 / AC-plug			
Display	2-line LCD			
Interface: RS485 / Wi-Fi / Ethernet	● / ○ / -			
Multi-function relay / digital input	- / -			
Guarantee: 5 / 10 / 15 / 20 / 25 years	● / ○ / ○ / ○ / ○			
Certificates and approvals (additional on request)	CE, TUV, VDE 0126-1-1, RD 1699, G83/2, EN 50178, EN 61000-3-2/3, EN 6100-6-1/2/3/4, IEC 62109-1/2, VDE AR-N4105, AS 4777.2/3, AS 3100:2009, C10/11, EN 50438, UTE C15-712-1, IEC 62116, IEC 61727			
● Standard features ○ Optional features — Not available				
Technical changes reserved				

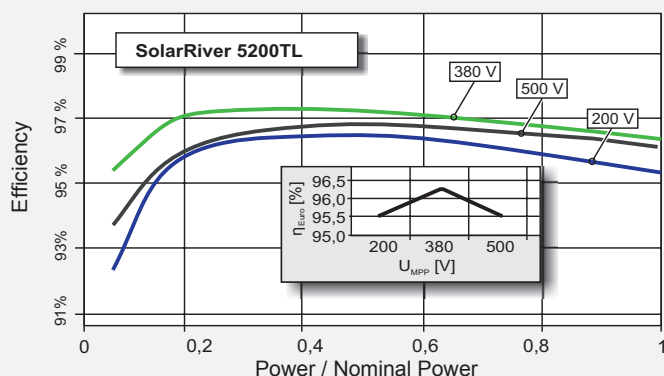

	SolarRiver 3300TL	SolarRiver 4400TL	SolarRiver 5200TL
Input (DC)			
Max. DC power (@cosφ=1)	3480 W	4580 W	5200 W
Max. input voltage	550 V		
MPP voltage range / rated input voltage	200 V - 500 V / 380 V		
Min. input voltage / initial input voltage	100 V / 150 V		
Max. input current input A / input B	17.5 A / -	21 A / -	26 A / -
Max. input current per string input A / input B	17.5 A / -	21 A / -	26 A / -
Number of independent MPP inputs / strings per MPP input	1 / 2		
Output (AC)			
Rated power (@ 230 V / 50 Hz)	3000 W	4000 W	4600 W
Max. apparent AC power	3300VA	4400VA	5000VA
Nominal AC voltage / range	230 V / 180 V - 270 V		
AC frequency / range	50 Hz, 60 Hz / 44 Hz - 55 Hz, 54 Hz - 65 Hz		
Rated grid voltage / rated grid frequency	230 V / 50 Hz		
Max. output current	16 A	22 A	24 A
Power factor at rated power	1		
Displacement power factor, adjustable	-		
Feed-in phases / connection phases	1 / 1		
Efficiency			
Max. Efficiency / European weighted efficiency	97.4 % / 96.5 %	97.6 % / 97.1 %	97.6 % / 96.8 %
Protective devices			
DC disconnect device / AC disconnect device	- / -		
Ground fault monitoring / grid monitoring	● / ●		
DC reverse polarity protection / AC short-circuit current capability	● / ●		
Galvanic isolation	-		
All-pole-sensitive residual-current monitoring	●		
Protection class (according to IEC 62103) / Overvoltage category (according to IEC 60664-1)	I / II (DC), III (AC)		
General data			
Dimensions (W / H / D)	329 / 433 / 180 mm		
Weight	20 kg		
Operating temperature range	-20 °C ... +60 °C		
Noise emission (typical)	< 30 dB	< 30 dB	< 40 dB
Self-consumption (night)	0 W		
Topology	Transformerless		
Cooling concept	Fan		
Degree of protection (according to IEC 60529)	IP65		
Maximum humidity (non-condensing)	95 %		
Features			
DC connection / AC connection	Multi-Contact MC4, Amphenol MC4 / AC-plug		
Display	2-line LCD		
Interface: RS485 / Wi-Fi / Ethernet	● / - / -		
Multi-function relay / digital input	- / -		
Guarantee: 5 / 10 / 15 / 20 / 25 years	● / ○ / ○ / ○ / ○		
Certificates and approvals (additional on request)	CE, TUV, VDE 0126-1-1, RD 1699, G83/2, EN 50178, EN 61000-3-2/3, EN 6100-6-1/2/3/4, IEC 62109-1/2, AS 4777.2/3, AS 3100:2009, C10/11, G59/2, EN 50438, UTE C15-712-1, IEC 62116, IEC 61727		



SAMIL POWER
Expert for PV Grid-tied Inverters

Samil Power Co., Ltd. (China)

Sales and Service Center, Wuxi
No.52, Huigu Innovation Park, Huishan District, Wuxi,
Jiangsu Province, 214174 P.R.C
T: +86 (0) 510 8359 3132
F: +86 (0) 510 8181 9678
E: info@samilpower.com

Samil Power Co., Ltd. (China)

Office, Shenzhen
7/F, Smart Power Grid Industry Park.
No.1124, Nanshan Avenue.
Nanshan district. Shenzhen, P.R.C
T: +86 (0) 755 2781 2568
F: +86 (0) 755 2781 3866

Samil Power Co., Ltd. (China)

Office, Beijing
Room 706, Building 6, Wanda plaza,
No.93 Jianguo Road,
Chaoyang District, Beijing, 100020 P.R.C
T: +86 (0) 10 5820 4482
F: +86 (0) 10 5820 3961

Samil Power Co., Ltd. (China)

Factory, Suqian
No.6 Xuefengshan Road,
Suyu District, Suqian,
Jiangsu Province, 214174 P.R.C

Samil Power US Ltd. (USA)

3478 Buskirk Avenue, Suite 1000,
Pleasant Hill, CA 94523
T: +1 (925) 930 3924
E: usa@samilpower.com

Support Center Australia

T: 02-85203242 or 1300 134793
E: service-australia@samilpower.com

Support Center Deutschland

T: 089-12140704
E: service-germany@samilpower.com

Centro Assistenza Italia

T: 02-60063040
E: service-italy@samilpower.com

Samil Power Ausco Pty Ltd. (Australia)

Sydney Business and Technology Centre
Unit 5/2 Railway Parade
Lidcombe NSW 2141
T: +61 (0) 2 9643 7788
E: australia@samilpower.com

Samil Power GmbH (Deutschland)

Siemensstrasse 1 + 1a
85716 Unterschleissheim-Lohhof
T: +49 (0) 89 8563341 10
F: +49 (0) 89 8563341 29
E: germany@samilpower.com

Samil Power s.r.l. (Italia)

Sede Legale: Corso di Porta Vittoria 18
20122 Milano
T: +39 02 45 077 584
F: +39 02 40 043 490
E: italy@samilpower.com

Samil Power UK Ltd. (UK)

Unit 19 Horseshoe Park Horseshoe Lane
Pangbourne Reading RG8 7JW
T: +44 (0) 118 984 4481
F: +44 (0) 118 984 4745
E: uk@samilpower.com

Samil Power France SARL (France)

10 Boulevard Marius
Vivier Merle
69003 Lyon
E: france@samilpower.com

Support Center Nederland

T: 020-7018205
E: service-netherlands@samilpower.com

Support Center UK

T: 0118-4029490
E: service-uk@samilpower.com

Support Center USA

T: 001-4154290135
E: service-usa@samilpower.com

