



## SolarLake 10000 / 12000 / 15000 / 17000TL

### **SIMPLE. FLEXIBLE.**

- Simplified system design due to dual MPPT and wide input voltage range up to 1,000 V
- Free site selection due to IP65
- Parameter and country code setting during initial start up


### **OPEN. INTERACTIVE.**

- Interface selection – Ethernet and RS485 for more flexible configuration and system monitoring
- Multi-lingual 3.5" TFT LCD display
- Easy key pad operation

### **SECURE. EFFICIENT.**

- Highest earnings through max. efficiency of > 98%
- Safe operation due to integrated DC-switch
- 5 year standard guarantee



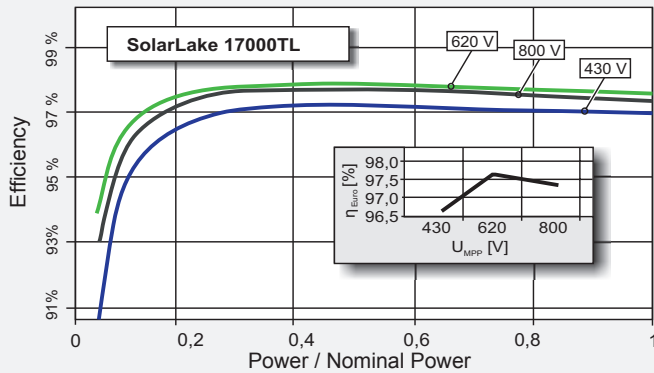

	SolarLake 10000TL	SolarLake 12000TL	SolarLake 15000TL	SolarLake 17000TL
<b>Input (DC)</b>				
Max. DC power (@cosφ=1) total / per MPP input	10500 W / 8000 W	12500 W / 8000 W	15600 W / 10000 W	17700 W / 10000 W
Max. input voltage	1000 V			
MPP voltage range / rated input voltage	320 V - 800 V / 620 V	380 V - 800 V / 620 V		430 V - 800 V / 620 V
Min. input voltage / initial input voltage	200 V / 250 V			
Max. input current input A / input B	16 A / 16 A		20 A / 20 A	
Max. input current per string input A / input B	16 A / 16 A		20 A / 20 A	
Number of independent MPP inputs / strings per MPP input	2 / 2			
<b>Output (AC)</b>				
Rated power (@ 230 V / 50 Hz)	10000 W	12000 W	15000 W	17000 W
Max. apparent AC power	10000 VA	12000 VA	15000 VA	17000 VA
Nominal AC voltage / range	3 / N / PE, 230 V, 400 V / 180 V - 277 V per phase			
AC frequency / range	50 Hz, 60 Hz / 44 Hz - 55 Hz, 54 Hz - 65 Hz			
Rated grid voltage / rated grid frequency	230 V / 50 Hz			
Max. output current	16 A	19.2 A	24 A	25 A
Power factor at rated power	1			
Displacement power factor, adjustable	0.9 leading - 0.9 lagging			
Feed-in phases / connection phases	3 / 3			
<b>Efficiency</b>				
Max. Efficiency / European weighted efficiency	97.9 % / 97.4 %		98 % / 97.6 %	
<b>Protective devices</b>				
DC disconnect device / AC disconnect device	• / -			
Ground fault monitoring / grid monitoring	• / •			
DC reverse polarity protection / AC short-circuit current capability	• / •			
Galvanic isolation	-			
All-pole-sensitive residual-current monitoring	•			
Protection class (according to IEC 62103) / Overvoltage category (according to IEC 60664-1)	I / II (DC), III (AC)			
<b>General data</b>				
Dimensions (W / H / D)	520 / 716 / 230 mm			
Weight	50 kg			
Operating temperature range	-25 °C ... +60 °C			
Noise emission (typical)	< 47 dB			
Self-consumption (night)	< 5 W			
Topology	Transformerless			
Cooling concept	Fan			
Degree of protection (according to IEC 60529)	IP65			
Maximum humidity (non-condensing)	95 %			
<b>Features</b>				
DC connection / AC connection	Multi-Contact MC4, Amphenol MC4 / Screw terminal			
Display	3.5" TFT LCD			
Interface: RS485 / Wi-Fi / Ethernet	• / - / •			
Multi-function relay / digital input	- / -			
Guarantee: 5 / 10 / 15 / 20 / 25 years	• / ○ / ○ / ○ / ○			
Certificates and approvals (additional on request)	CE, TUV, BDEW, VDE 0126-1-1, RD 1699, G59/2, EN 61000-3-11/12, EN 6100-6-1/2/3/4, IEC 62109-1/2, VDE AR-N4105, CEI 0-21, CEI 0-16, AS 4777.2/3, AS 3100:2009, C10/11, EN 50438, UTE C15-712-1, IEC 62116, IEC 61727			



**Samil Power Co., Ltd. (China)**

Sales and Service Center, Wuxi  
No.52, Huigu Innovation Park, Huishan District, Wuxi,  
Jiangsu Province, 214174 P.R.C  
T: +86 (0) 510 8359 3132  
F: +86 (0) 510 8181 9678  
E: info@samilpower.com

**Samil Power Co., Ltd. (China)**

Office, Shenzhen  
7/F, Smart Power Grid Industry Park.  
No.1124, Nanshan Avenue.  
Nanshan district. Shenzhen, P.R.C  
T: +86 (0) 755 2781 2568  
F: +86 (0) 755 2781 3866

**Samil Power Co., Ltd. (China)**

Office, Beijing  
Room 706, Building 6, Wanda plaza,  
No.93 Jianguo Road,  
Chaoyang District, Beijing, 100020 P.R.C  
T: +86 (0) 10 5820 4482  
F: +86 (0) 10 5820 3961

**Samil Power Co., Ltd. (China)**

Factory, Suqian  
No.6 Xuefengshan Road,  
Suyu District, Suqian,  
Jiangsu Province, 214174 P.R.C

**Samil Power US Ltd. (USA)**

3478 Buskirk Avenue, Suite 1000,  
Pleasant Hill, CA 94523  
T: +1 (925) 930 3924  
E: usa@samilpower.com

**Support Center Australia**

T: 02-85203242 or 1300 134793  
E: service-australia@samilpower.com

**Support Center Deutschland**

T: 089-12140704  
E: service-germany@samilpower.com

**Centro Assistenza Italia**

T: 02-60063040  
E: service-italy@samilpower.com

**Samil Power Ausco Pty Ltd. (Australia)**

Sydney Business and Technology Centre  
Unit 5/2 Railway Parade  
Lidcombe NSW 2141  
T: +61 (0) 2 9643 7788  
E: australia@samilpower.com

**Samil Power GmbH (Deutschland)**

Siemensstrasse 1 + 1a  
85716 Unterschleissheim-Lohhof  
T: +49 (0) 89 8563341 10  
F: +49 (0) 89 8563341 29  
E: germany@samilpower.com

**Samil Power s.r.l. (Italia)**

Sede Legale: Corso di Porta Vittoria 18  
20122 Milano  
T: +39 02 45 077 584  
F: +39 02 40 043 490  
E: italy@samilpower.com

**Samil Power UK Ltd. (UK)**

Unit 19 Horseshoe Park Horseshoe Lane  
Pangbourne Reading RG8 7JW  
T: +44 (0) 118 984 4481  
F: +44 (0) 118 984 4745  
E: uk@samilpower.com

**Samil Power France SARL (France)**

10 Boulevard Marius  
Vivier Merle  
69003 Lyon  
E: france@samilpower.com

**Support Center Nederland**

T: 020-7018205  
E: service-netherlands@samilpower.com

**Support Center UK**

T: 0118-4029490  
E: service-uk@samilpower.com

**Support Center USA**

T: 001-4154290135  
E: service-usa@samilpower.com

