ENERGIZING LIFE TOGETHER



HIGH PERFORMANCE SOLAR MODULES

REC PEAK **ENERGY BLK** SERIES

REC Peak Energy BLK Series modules are the perfect choice for building solar systems that combine long lasting product quality with reliable power output. REC combines high quality design and manufacturing standards to produce high-performance solar modules with uncompromising quality.



MORE POWER PER FT²



ENERGY PAYBACK TIME OF ONE YEAR




ROBUST AND DURABLE DESIGN



SILICON

REC PEAK ENERGY BLK SERIES

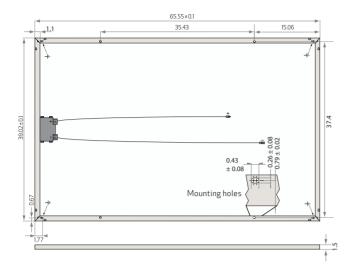

ELECTRICAL DATA @ STC	REC235PE BLK	REC240PE BLK	REC245PE BLK	REC250PE BLK	REC255PE BLK	REC260PE BLK
Nominal Power - P _{MPP} (Wp)	235	240	245	250	255	260
Watt Class Sorting-(W)	0/+5	0/+5	0/+5	0/+5	0/+5	0/+5
Nominal Power Voltage - $V_{_{MPP}}(V)$	29.5	29.7	30.1	30.2	30.5	30.7
Nominal Power Current - I _{MPP} (A)	8.06	8.17	8.23	8.30	8.42	8.50
Open Circuit Voltage - V _{oc} (V)	36.6	36.8	37.1	37.4	37.6	37.8
Short Circuit Current - I _{sc} (A)	8.66	8.75	8.80	8.86	8.95	9.01
Module Efficiency (%)	14.2	14.5	14.8	15.1	15.5	15.8

Analysed data demonstrates that 99.7% of modules produced have current and voltage tolerance of ±3% from nominal values. Values at standard test conditions STC (airmass AM 1.5, irradiance 1000 W/m², cell temperature 25°C).

At low irradiance of 200 W/m² (AM 1.5 and cell temperature 25°C) at least 97% of the STC module efficiency will be achieved.

ELECTRICAL DATA @ NOCT	REC235PE BLK	REC240PE BLK	REC245PE BLK	REC250PE BLK	REC255PE BLK	REC260PE BLK
Nominal Power - P _{MPP} (Wp)	179	183	187	189	193	197
Nominal Power Voltage - V _{MPP} (V)	27.5	27.7	28.1	28.3	28.5	29.0
Nominal Power Current - I _{MPP} (A)	6.51	6.58	6.64	6.68	6.77	6.81
Open Circuit Voltage - V _{oc} (V)	34.2	34.4	34.7	35.0	35.3	35.7
Short Circuit Current - I _{sc} (A)	6.96	7.03	7.08	7.12	7.21	7.24
Nominal call operating temperature NOCT (900 W/m^2 AM1E windspeed 1 m/s ambient temperature 30%)						

Nominal cell operating temperature NOCT (800 W/m², AM 1.5, windspeed 1 m/s, ambient temperature 20°C).



(salt mist corrosion - severity level 6).

WARRANTY

10 year product warranty.25 year linear power output warranty (max. degression in performance of 0.7% p.a.).

15.8%	EFFICIENCY			
10	YEAR PRODUCT WARRANTY			
25	YEAR LINEAR POWER OUTPUT WARRANTY			
TEMPERATURE RATINGS				
Nominal Operating Cell Temperature (NOCT) 45.7°C (±2				

Nominal Operating Cell Temperature (NOCT)	45.7°C (±2°C)
Temperature Coefficient of P _{MPP}	-0.40 %/°C
Temperature Coefficient of V _{oc}	-0.27 %/°C
Temperature Coefficient of I _{sc}	0.024 %/°C

GENERAL DAT	A
Cell Type:	60 REC PE multi-crystalline
	3 strings of 20 cells
Glass:	1/8" mm solar glass with
	anti-reflection surface treatment
Back Sheet:	Double layer highly resistant polyester
Frame:	Anodized aluminium (black)
Junction Box:	IP67 rated
	4 bypass diodes
	4 mm² solar cable, 35" + 47"
	Hosiden 4 mm ² connectors, MC4 connectable

MAXIMUM RATINGS	
Operational Temperature:	-40 +80°C
Maximum System Voltage:	600 V
Design Load:	75.2 lbs/ft² (3600 Pa)* 33.4 lbs/ft² (1600 Pa)* *Refer to installation manual
Max Series Fuse Rating:	15 A
Max Reverse Current:	15 A

MECHANICAL DATA	
Dimensions:	65.55 x 39.02 x 1.5 in
Area:	17.76 ft ²
Weight:	39.6 lbs

Note! Specifications subject to change without notice.



www.recgroup.com

REC is a leading global provider of solar electricity solutions. With nearly two decades of expertise, we offer sustainable, highperforming products, services and investment opportunities for the solar and electronics industries. Together with our partners, we create value by providing solutions that better meet the world's growing electricity needs. Our 2,400 employees worldwide generated revenues of more than NOK 13 billion in 2011, approximately USD 2.4 billion. To see more of what REC can offer, visit www.recgroup.com