



Data sheet

Powador

30.0 TL3 | 33.0 TL3
36.0 TL3 | 39.0 TL3
40.0 TL3 | 60.0 TL3

Efficient. Flexible. Future-oriented.

The transformerless three-phase inverters Powador 30.0 TL3 to 60.0 TL3.

The transformerless three-phase inverters Powador 30.0 TL3 to 60.0 TL3 are designed specifically for decentralised installation of photovoltaic systems for commercial and industrial applications, such as hangars and factory roofs.

These units give you extreme flexibility in designing your PV system. They operate using three separate MPP trackers that can handle both symmetrical and asymmetrical loads to allow for optimum adjustment. Each tracker is able to process 20 kW. This enables them to meet all the typical demands of more complex designs involved with inhomogenous installation of the photovoltaic generator. Three MPP trackers can also compensate for mismatches between modules, such as those resulting from temperature differences and uneven solar radiation. Depending on the design of the units, one string (M version) or four strings (XL version) can be connected per MPP tracker. The input voltage range is particularly

broad: the inverters switch to the grid from 250 V, and, when in operation, they still feed in at 200V to ensure the solar yield from comparatively small areas. Maximum efficiency amounts to approx. 98%, and up to 97.8% European efficiency is furthermore quite remarkable. At just 5 % rated power they operate at 95 % efficiency.

It is easy to achieve perfect communication with these units. They are fitted with an integrated data logger with web server, a graphical display for showing operating data and a USB port for installing firmware updates. The current software can be downloaded free of charge from the download area of our homepage. The yield data can be called from the web server or via USB for evaluation. The integrated data logger can also be connected directly to the Powador-web internet portal for professional evaluation and visualisation of the inverter data.

A number of country-specific default settings are programmed into the inverters. These are easy to select during on-site installation. The interface language can be selected separately.

The integrated string collector with string fuses and overvoltage protection for the XL version of the units opens up significant cost advantages. The M version uses the external Powador Mini-Argus string collector instead.

Two additional XL versions now provide extraordinary flexibility:

- XL-F with fusing at the plus and minus inputs
- XL-SPD 1+2 with class 1 & 2 surge protection devices in front of each MPP tracker.

Technical data

Powador 30.0 TL3 | 33.0 TL3 | 36.0 TL3 | 39.0 TL3 | 40.0 TL3 | 60.0 TL3

Electrical data	30.0 TL3	33.0 TL3	36.0 TL3
Input variables			
MPP range	200 V ... 800 V ¹⁾	200 V ... 800 V ¹⁾	200 V ... 800 V ¹⁾
Starting voltage	250 V	250 V	250 V
No-load voltage	1 000 V	1 000 V	1 000 V
Max. input current	3x34.0 A	3x34.0 A	3x34.0 A
Number of MPP trackers	3	3	3
Max. power/tracker	20 kW	20 kW	20 kW
Number of strings	3x1 based on design M 3x4 based on design XL	3x1 based on design M 3x4 based on design XL	3x1 based on design M 3x4 based on design XL
Output variables			
Rated output (@ 230 V)	25 000 VA	27 500 VA	30 000 VA
Line voltage	acc. to local requirements	acc. to local requirements	acc. to local requirements
Rated current	3x36.2 A	3x39.9 A	3x43.5 A
Rated frequency	50 Hz / 60 Hz	50 Hz / 60 Hz	50 Hz / 60 Hz
cos phi	0.80 inductive ... 0.80 capacitive	0.80 inductive ... 0.80 capacitive	0.80 inductive ... 0.80 capacitive
Number of grid phases	3	3	3
General electrical data			
Max. efficiency	98.0 %	98.0 %	98.0 %
European efficiency	97.8 %	97.8 %	97.8 %
Night consumption	1.5 W	1.5 W	1.5 W
Switching plan	transformerless	transformerless	transformerless
Grid monitoring	acc. to local requirements	acc. to local requirements	acc. to local requirements
Mechanical data			
Display	graphical display + LEDs	graphical display + LEDs	graphical display + LEDs
Control units	4-way navigation + 2 buttons	4-way navigation + 2 buttons	4-way navigation + 2 buttons
Interfaces	Ethernet, USB, RS485, S0 output, digital input “inverter off”		
Fault signalling relay	Potential-free NO contact, max. 30 V DC/1A or 230 V AC/1 A		
Connections	AC connection via screw terminals, bushing 1xM50, max cross section: 50 mm² (flexible); DC connection of M version: spring-type terminals 6-35 mm² ³⁾ ; DC connection of XL version: screw and spring-type terminals 10 mm², bushing 6xM32		
Ambient temperature	-20 °C ... +60 °C ⁴⁾	-20 °C ... +60 °C ⁴⁾	-20 °C ... +60 °C ⁴⁾
Cooling	fan, max. 600 m³ / h	fan, max. 600 m³ / h	fan, max. 600 m³ / h
Protection class	IP54	IP54	IP54
Noise emission	58 dB (A) (only fan noise)	58 dB (A) (only fan noise)	58 dB (A) (only fan noise)
DC switch	integrated	integrated	integrated
H x W x D	1 360 x 840 x 355 mm	1 360 x 840 x 355 mm	1 360 x 840 x 355 mm
Weight	151 kg	151 kg	151 kg
Product variants			
Version M	DC switch		
Version XL	DC switch / fuse protection DC input plus / overvoltage protection type 2		
Version XL-SPD 1+2	DC switch / fuse protection DC input plus / overvoltage protection type 1 + 2		
Version XL-F	DC switch / fuse protection DC input plus and minus / overvoltage protection type 2		

39.0 TL3	40.0 TL3	60.0 TL3
200 V ... 800 V ¹⁾	200 V ... 800 V ¹⁾	200 V ... 850 V ²⁾
250 V	250 V	250 V
1 000 V	1 000 V	1 000 V
3x34.0 A	3x34.0 A	3x36.0 A
3	3	3
20 kW	20 kW	20 kW
3x1 based on design M 3x4 based on design XL	3x1 based on design M 3x4 based on design XL	3x1 based on design M 3x4 based on design XL
33 300 VA	36 000 VA	49 900 VA
acc. to local requirements	acc. to local requirements	acc. to local requirements
3x48.3 A	3x52.2 A	3x72.2 A
50 Hz / 60 Hz	50 Hz / 60 Hz	50 Hz / 60 Hz
0.80 inductive ... 0.80 capacitive	0.80 inductive ... 0.80 capacitive	0.80 inductive ... 0.80 capacitive
3	3	3
98.0 %	97.5 %	97.8 %
97.8 %	97.2 %	97.6 %
1.5 W	1.5 W	1.5 W
transformerless	transformerless	transformerless
acc. to local requirements	acc. to local requirements	acc. to local requirements
graphical display + LEDs	graphical display + LEDs	graphical display + LEDs
4-way navigation + 2 buttons	4-way navigation + 2 buttons	4-way navigation + 2 buttons
Ethernet, USB, RS485, S0 output, digital input “inverter off”		
Potential-free NO contact, max. 30 V DC/1A or 230 V AC/1 A		
AC connection via screw terminals, bushing 1xM50, max cross section: 50 mm² (flexible); DC connection of M version: spring-type terminals 6-35 mm² ³⁾ ; DC connection of XL version: screw and spring-type terminals 10 mm², bushing 6xM32		
-20 °C ... +60 °C ⁴⁾	-20 °C ... +60 °C ⁴⁾	-20 °C ... +60 °C ⁵⁾
fan, max. 600 m³ / h	fan, max. 600 m³ / h	fan, max. 600 m³ / h
IP54t	IP54	IP54
58 dB (A) (only fan noise)	58 dB (A) (only fan noise)	58 dB (A) (only fan noise)
integrated	integrated	integrated
1 360 x 840 x 355 mm	1 360 x 840 x 355 mm	1 360 x 840 x 355 mm
151 kg	151 kg	173 kg
Product variants		
DC switch		
DC switch / fuse protection DC input plus / overvoltage protection type 2		
DC switch / fuse protection DC input plus / overvoltage protection type 1 + 2		
DC switch / fuse protection DC input plus and minus / overvoltage protection type 2		

¹⁾ The possible input power is reduced at voltages lower than 350 V. The input current is limited to 34.0 A per input.
²⁾ The possible input power is reduced at voltages lower than 480 V. The input current is limited to 36.0 A per input. ³⁾ Only in conjunction with external Powador Mini-Argus
⁴⁾ Power derating at high ambient temperatures. ⁵⁾ Possible power derating at temperatures above 40 °C.
Conforms to the country-specific standards and regulations according to the country version that has been set.

¹⁾ The possible input power is reduced at voltages lower than 350 V. The input current is limited to 34.0 A per input.
²⁾ The possible input power is reduced at voltages lower than 480 V. The input current is limited to 36.0 A per input. ³⁾ Only in conjunction with external Powador Mini-Argus
⁴⁾ Power derating at high ambient temperatures. ⁵⁾ Possible power derating at temperatures above 40 °C.
Conforms to the country-specific standards and regulations according to the country version that has been set.



Powador
 30.0 TL3 | 33.0 TL3
 36.0 TL3 | 39.0 TL3
 40.0 TL3 | 60.0 TL3

Up to 98.0 % efficiency

3 MPP trackers, symmetrical
 and asymmetrical loading possible

Multilingual menu


Cost-saving DC input configuration
 available

Integrated web server


USB connection for updates

Graphical Display of efficiency

3D efficiency diagram for Powador 39.0 TL3

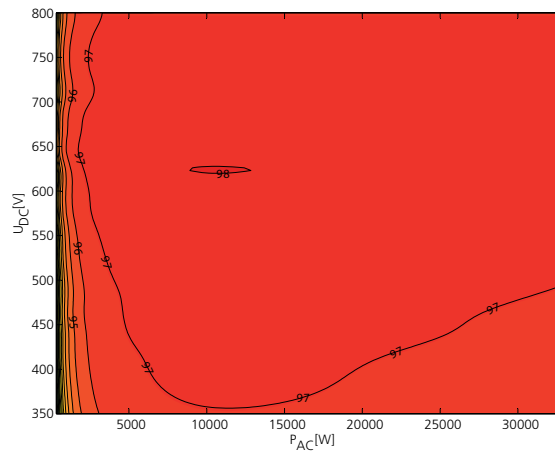

Efficiency characteristic curve for Powador 39.0 TL3

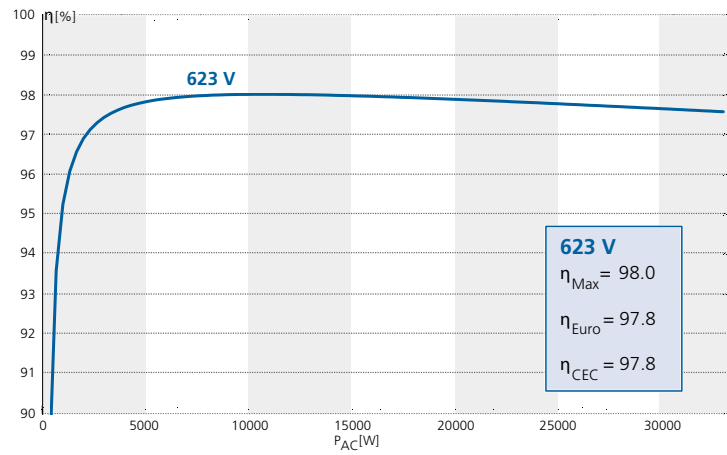

Your retailer