



M8

Series	AGM-S	Warranty	See Warranty Terms
Volts	8	BCI	GC8
Cells	4		
Terminal Type	DT		
Included Hardware	Stainless Steel Nuts & Bolts		
Size & Thread	M8		

### Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	35 A
Maximum Charge Current (String)	50 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	3.2 mΩ

### Capacity

Cold Crank Amps (CCA) 0°F / -17°C							680		
Capacity Affect by Temperature					40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)	
					102%	100%	85%	65%	
Hour Rate		Capacity / AMP Hour					Current / AMPs		
@ 100 Hour Rate		200 AH					2.0 A		
@ 20 Hour Rate		170 AH					8.5 A		
@ 10 Hour Rate		162 AH					16.2 A		
@ 5 Hour Rate		150 AH					29.9 A		
Cut Off Voltage		Constant Current Discharge							
VPC		1 hr	2 hr	3 hr	4 hr	5 hr	6 hr	8 hr	10 hr
		95	57.2	43.9	35.1	29.9	25	19.9	16.6

### Specifications




SAI GLOBAL  
ISO 9001  
Quality

Weight	34.5 kg	76 lbs
Length	26 cm	10.23"
Width	18.2 cm	7.17"
Height Inc. Term.	31.4 cm	12.36"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	ABS
Cover	ABS
Handles	Nylon Strap

### Cycle Life vs. Depth of Discharge

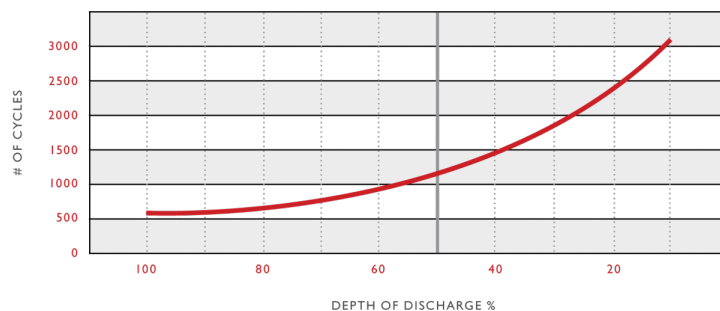

### Capacity vs. Temperature

